




YUASA

閥調式鉛酸蓄電池 (VRLA)
Valve Regulated Lead Acid Battery

UXH26-12I

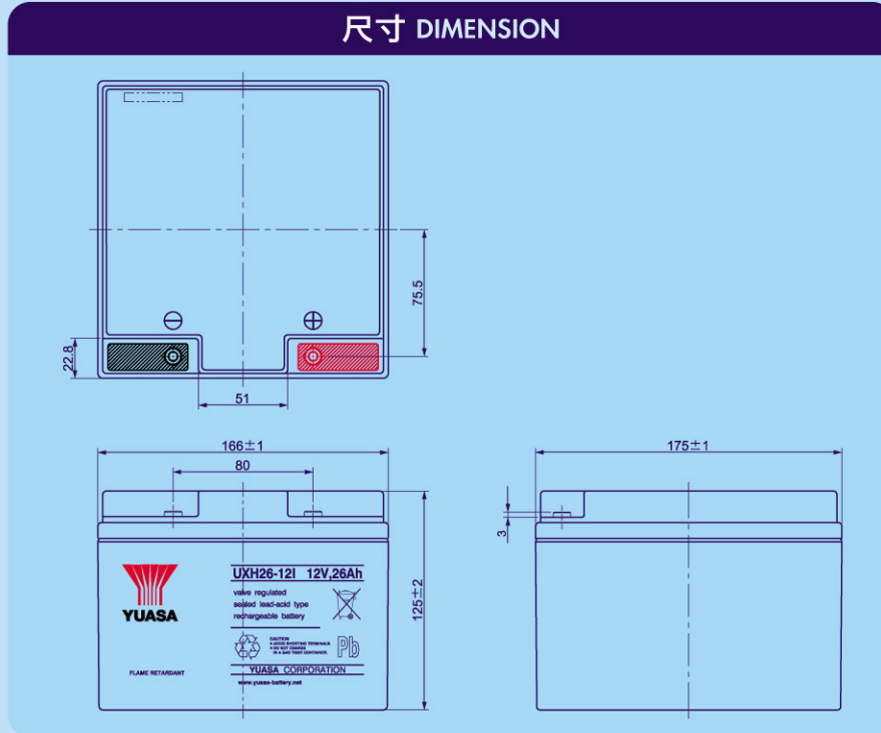

公稱電壓 Nominal Voltage : 12V

尺寸 Dimension

長度 Length : 166 ± 1mm

寬度 Width : 175 ± 1mm

高度 Height : 125 ± 2mm

重量 Weight (Approx.) : 11.5Kg

公稱容量 Nominal Capacity

20小時率 20HR · rate of 1.3A To 10.8V 26AH

內部阻抗 Internal Resistance : 9.2mΩ

最大充電電流 Max Charge Current : 6.5A (0.25CA)

最大放電電流 Max Discharge Current : 350A (5秒)

浮充 Float Charging: 13.65 ± 0.15V

操作溫度範圍 Operation Temperature Range

-15°C To 50°C (5°F To 122°F)

保存溫度範圍 Storage Temperature Range

-15°C To 40°C (5°F To 104°F)

壽命 Expected Life (25°C)

10 years in floating charge

密閉構造 Sealed Construction

Can be operated, charged or stored in any position without leakage.

Can't be charged while the terminal is downward.

凹入及標準式端子 Insert Terminal : M5 Bolt

電槽材質 Housing Material : Flame Retardant ABS (UL94-V0)

耐燃 / 氧氣指數 LOI 28.0%

整體型防爆裝置 Integral Flame Arrestor

極柱與電槽密封採用環氧樹脂 Epoxy Resin

用途 Applications :

無停電裝置、電信、照明、警報、儀器、醫療、

太陽能、發電機、控制設備、配電系統


UXH26-12I PERFORMANCE DATA AT 25°C (77°F)-Amperes and watts

F.V.	Time	Minutes										Hours							
		1	5	10	15	20	25	30	35	40	45	1	2	3	5	8	10	12	20
1.60 (9.60)	A	117.0	99.9	73.0	54.0	43.6	37.0	32.1	28.7	25.7	23.5	18.5	10.6	7.6	4.9	3.3	2.7	2.4	1.4
	W	1161	999	734.4	577.8	481.1	418	371	332.1	301.3	275.4	213.3	121.4	86.6	57	38.5	32.2	28	15.8
1.63 (9.78)	A	114.3	97.2	70.1	52.7	42.9	36.5	31.8	28.5	25.7	23.5	18.5	10.6	7.6	4.9	3.3	2.7	2.4	1.4
	W	1145	982.8	723.6	572.4	474.7	411.5	366.1	328.9	298.1	273.8	213.3	121.4	86.6	57	38.5	32.2	28	15.8
1.65 (9.90)	A	112.5	94.5	68.3	51.9	42.5	36.3	31.6	28.4	25.6	23.5	18.5	10.6	7.6	4.9	3.3	2.7	2.4	1.4
	W	1134	977.4	718.2	567	471.4	408.2	362.9	325.6	296.5	272.2	213.3	121.4	86.6	57	40.1	32.2	28	15.8
1.67 (10.02)	A	110.7	92.7	66.7	51.1	42.1	35.9	31.3	28.3	25.6	23.5	18.5	10.6	7.6	4.9	3.3	2.7	2.4	1.4
	W	1123	966.6	707.4	561.6	468.2	403.4	358	322.4	294.8	272.2	213.3	121.4	86.6	57	38.5	32.2	28	15.8
1.70 (10.20)	A	108.0	90.0	64.3	50.0	41.6	35.6	31.1	28.2	25.5	23.3	18.5	10.6	7.6	4.9	3.3	2.7	2.4	1.4
	W	1107	934.2	696.6	550.8	461.7	396.9	353.2	319.1	291.6	270.5	213.3	121.4	86.6	57	38.5	32.2	28	15.8
1.75 (10.50)	A	94.5	80.6	59.3	47.3	40.0	34.7	30.3	27.5	25.0	22.7	18.0	10.4	7.3	4.8	3.2	2.7	2.3	1.3
	W	1010	869.4	653.4	518.4	440.6	383.9	341.8	309.4	283.5	262.4	208	119.3	85	56.5	38	31.7	28	15.8
1.80 (10.80)	A	84.4	73.0	55.1	45.0	38.6	33.8	29.7	27.0	24.6	22.1	17.6	10.1	7.1	4.8	3.1	2.6	2.3	1.3
	W	912.6	777.6	604.8	486	419.6	371	328.1	299.7	275.4	252.7	202.8	117.2	84	55.4	37.5	31.2	26.9	15.8
1.83 (10.98)	A	70.6	60.6	47.4	39.6	34.6	30.5	28.0	24.9	22.8	20.8	16.6	9.9	7.0	4.6	3.0	2.5	2.2	1.3
	W	804.6	685.8	545.4	449.3	393.1	348.8	311.6	285.1	260.8	240.8	194.3	114.6	82.4	53.3	36.4	30.1	25.9	15.3
1.85 (11.10)	A	61.4	52.5	42.5	36.0	31.8	28.4	27.0	23.5	21.6	19.9	16.0	9.6	6.9	4.5	2.9	2.4	2.1	1.3
	W	734.4	626.4	503.8	423.9	375.8	333.7	299.7	275.4	251.1	233.3	188.5	113	81.3	51.7	35.4	29	25.3	14.8


放電 DISCHARGING

放電特性 DISCHARGING CHARACTERISTICS

放電曲線 Discharging Characteristics Curves at 25°C

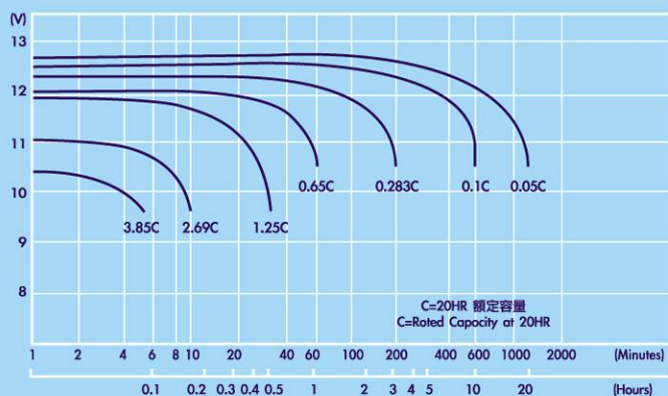


壽命特性 ACCELERATED LIFE CHARACTERISTIC

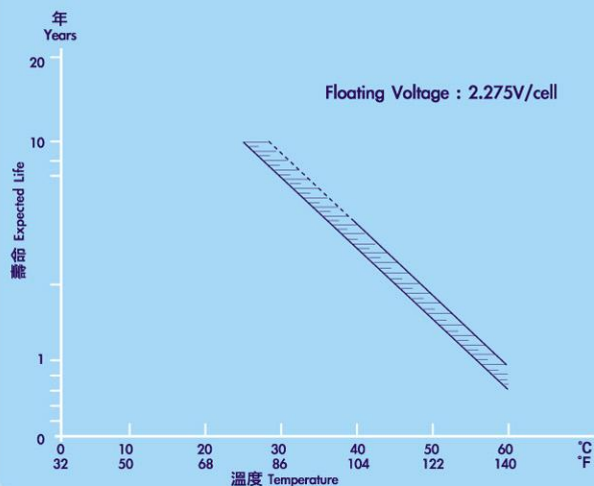

充電 CHARGING

充電特性 CHARGING CHARACTERISTICS

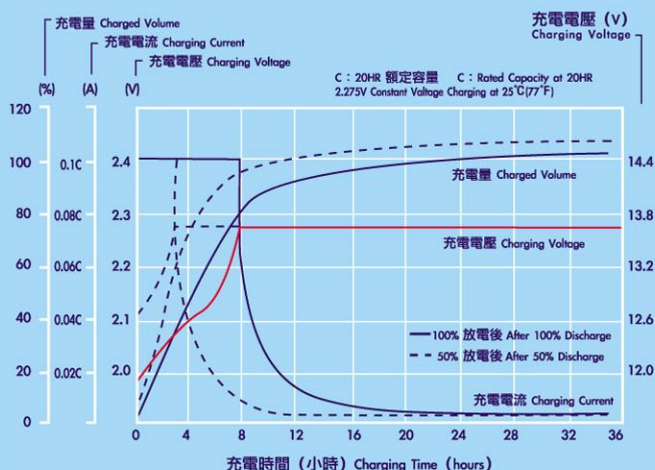

充電電壓 CHARGING VOLTAGE

