




# UXH200-6 PERFORMANCE DATA AT 25°C (77°F)-Amperes and watts


Time F.V.		1	5	10	15	20	25	30	35	40	45	1	2	3	4	5	8	10	20
		min	min	min	min	min	min	min	min	min	min	h	h	h	h	h	h	h	h
5.49 (1.83)	A	600	470	400	300	270	234	230	204	174	164	136	72	54	40.4	34	24	19.7	9.9
	W	3250	2800	2200	2000	1700	1400	1340	1140	1030	950	760	445	312	250	204	132	108	60
5.40 (1.80)	A	680	550	440	330	290	250	240	210	180	170	142	78	58	41.4	37	25	19.8	10
	W	3500	2950	2400	2076	1770	1470	1380	1170	1080	990	786	453	324	255	213	141	117	63
5.25 (1.75)	A	760	610	480	358	306	264	244	215	185	175	144	80	59	42	38.5	26	20	10.1
	W	4000	3250	2575	2160	1830	1530	1407	1190	1120	1020	795	458	330	260	220	151	129	66
5.10 (1.70)	A	860	670	520	390	320	280	250	220	190	180	146	82	60	42.6	39	26.4	20	10.1
	W	4400	3500	2760	2250	1890	1590	1440	1290	1170	1050	810	462	342	264	225	155	135	67
5.01 (1.67)	A	950	720	534	404	324	288	254	228	194	184	148	84	62	42.8	39.4	26.4	20.1	10.2
	W	4700	3700	2815	2285	1910	1630	1458	1332	1200	1070	825	471	348	270	230	158	138	68
4.95 (1.65)	A	980	730	540	408	326	290	256	230	196	186	149	85	63	43	39.6	26.6	20.1	10.2
	W	4750	3800	2880	2304	1944	1690	1464	1344	1218	1098	830	480	372	273	233	160	140	69
4.80 (1.60)	A	1070	790	560	420	330	300	260	240	200	190	150	85.6	63.4	43.4	39.8	26.7	20.2	10.3
	W	5000	3950	2910	2310	1950	1710	1470	1350	1230	1110	840	485	375	280	235	163	143	70

## 放電 DISCHARGING

### 放電特性 DISCHARGING CHARACTERISTICS

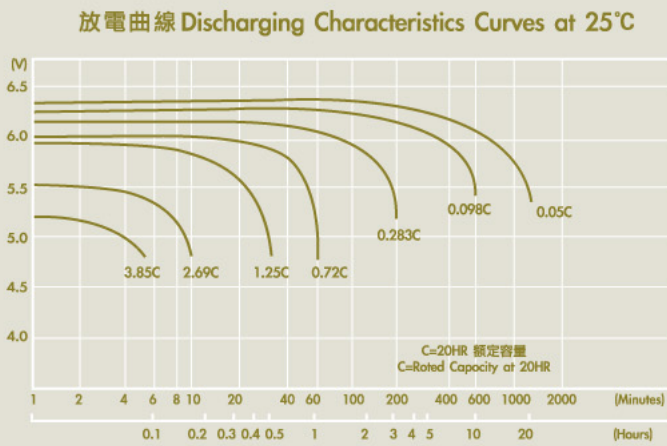


### 壽命特性 ACCELERATED LIFE CHARACTERISTIC

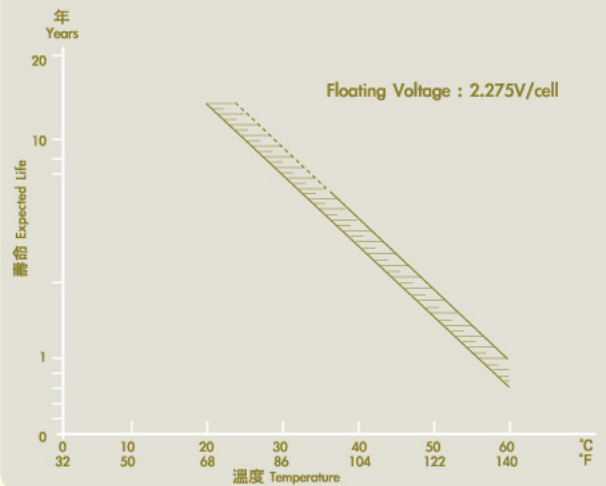

## 充電 CHARGING

### 充電特性 CHARGING CHARACTERISTICS

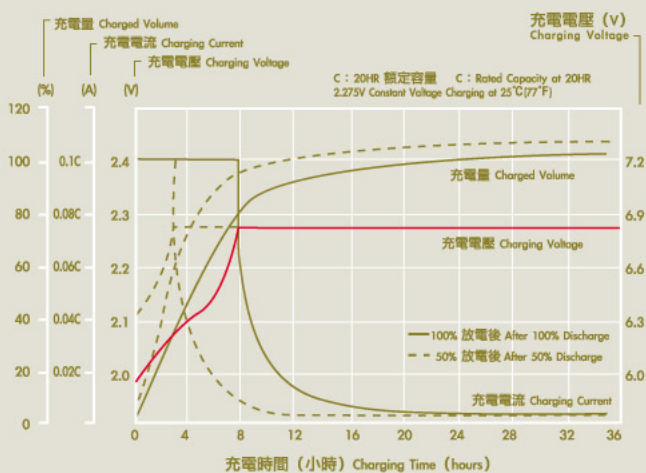

### 充電電壓 CHARGING VOLTAGE

